




PRODUCT SPECIFICATION

**HDA500V**

5", 800 X 480 (WVGA) TFT COLOR GRAPHICS  
LCD DISPLAY MODULE

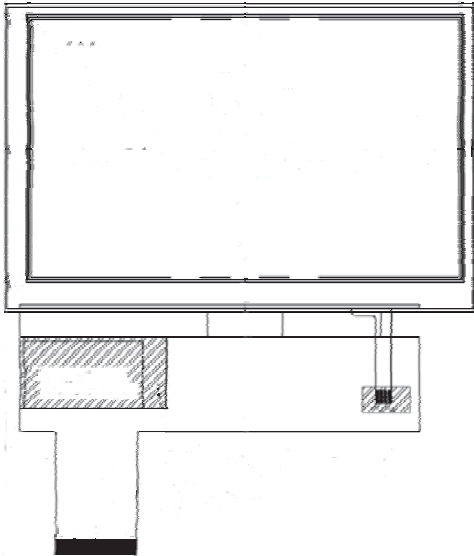

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.: Z.W.	REV.: 1.0	HDA500V	SHEET 1 OF 22 DATE: 5/19/10
--	---------------	--------------	---------	--------------------------------

## Application

This specification is applied to the 5 inch WVGA supported TFT-LCD module, and can display true 16.7M colors(8 bit/ color). The module is designed for OA, Car TV application and other electronic products which require flat panel display of digital signal interface. This module is composed of a 5" TFT-LCD panel, a driver circuit and backlight unit.

## Features

- WVGA (800×480 pixels) resolution.
- Digital 24 bit parallel RGB.
- Dot inversion mode with stripe type.

## General Specifications

Item	Specifications	Unit
Screen Size	5 (Diagonal)	inch
Display Format	800RGB(H)×480(V)	dot
Active Area	108(H)×64.8(V)	mm
Pixel Size	0.135(H)×0.135(V)	mm
Pixel Configuration	RGB Vertical Stripe	-
Display Mode	TN Type Transmissive Mode Normally White	-
Surface Treatment	Anti-Glare and Hard Coating(3H)	-
Viewing Direction	6 O'clock (The Gray Inversion will appear at this direction)	-
Outline Dimension	118.5(W)×77.55(H)×3.4(D)	mm
Weight	60.4	g

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.:	REV.:	HDA500V	SHEET 2 OF 22
	Z.W.	1.0		DATE: 5/19/10

## Absolute Maximum Ratings

### Absolute Ratings of Environment

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T <sub>ST</sub>	-30	+80	°C	(1)(3)
Operating Temperature	T <sub>OP</sub>	-20	+70	°C	(1)(2)

Note1: Background color changes slightly depending on ambient temperature.

This phenomenon is reversible.

Note2: Ta ≤ 70°C: 75%RH max.

Note3: Please refer to item of RELIABILITY.

## Electrical Absolute Ratings

### TFT-LCD Module

(Ta=25±2°C, GND=V<sub>SS</sub>=0V)

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Digital Power Supply Voltage	V <sub>CC</sub>	-0.3	7.0	V	-

### Backlight Unit

(Ta=25±2°C)

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Current of Backlight Unit	I <sub>B</sub>	-	50	mA	(1)
Voltage of Backlight Unit	V <sub>B</sub>	-	35	V	(1)

Note (1) Permanent damage to the device may occur if maximum values are exceeded or reverse voltage is loaded.

## Electrical Characteristics

### TFT-LCD Module

(Ta=25±2°C)

Item	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Power Supply Voltage	V <sub>CC</sub>	2.7	3.3	3.6	V	-
Power Supply Current	I <sub>CC</sub>	-	110	154	mA	(1)
Input High Threshold Voltage	V <sub>IH</sub>	0.7V <sub>CC</sub>	-	V <sub>CC</sub>	V	-
Input Low Threshold Voltage	V <sub>IL</sub>	0	-	0.3V <sub>CC</sub>	V	-
Power Consumption	P <sub>L</sub>	-	363	508	mW	(1)
VSYNC Frequency	F <sub>V</sub>	-	60	-	Hz	-
DCLK Frequency	DCLK	-	33.26	-	MHz	-

Note (1) The specified power consumption is under the conditions at V<sub>CC</sub>=3.3V, F<sub>V</sub>=60Hz, whereas a power dissipation check pattern below is displayed.

Black Pattern / 0 Gray



Active Area

## Backlight Unit

(Ta=25±2°C)


Item	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
Current of Backlight Unit	I <sub>B</sub>	-	40	-	mA	-
Voltage of Backlight Unit	V <sub>B</sub>	-	23.1	-	V	I <sub>B</sub> =40mA
Power Consumption	P <sub>BL</sub>	-	(0.924)	-	W	I <sub>B</sub> =40mA
LED Life Time(25°C)	-	10000	-	-	hr	(1)

Note (1) : LED life time is defined as under 25±2°C , when the average brightness decrease to 50% of original brightness

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.:	REV.:	HDA500V	SHEET 4 OF 22
	Z.W.	1.0		DATE: 5/19/10

# Block Diagram

## TFT-LCD Module with Backlight Unit

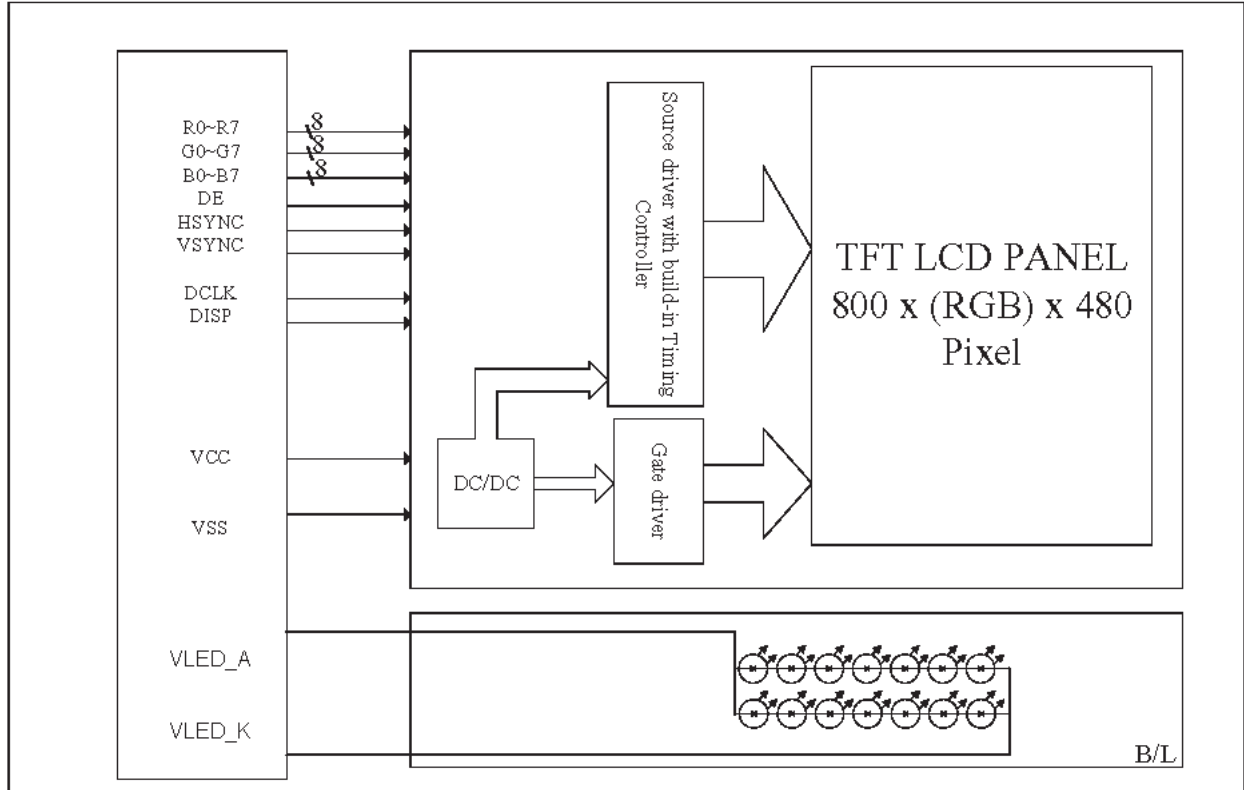

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.:	REV.:	HDA500V	SHEET 5 OF 22
	Z.W.	1.0		DATE: 5/19/10

## Input / Output Terminals Pin Assignment

### TFT-LCD Module

Pin No.	Symbol	I/O	Description
1	VLED_K	I	LED Cathode
2	VLED_A	I	LED Anode
3	GND	I	Ground
4	V <sub>CC</sub>	I	+3.3V power supply
5	R0	I	RED data (LSB)
6	R1	I	RED data
7	R2	I	RED data
8	R3	I	RED data
9	R4	I	RED data
10	R5	I	RED data
11	R6	I	RED data
12	R7	I	RED data(MSB)
13	G0	I	GREEN data(LSB)
14	G1	I	GREEN data
15	G2	I	GREEN data
16	G3	I	GREEN data
17	G4	I	GREEN data
18	G5	I	GREEN data
19	G6	I	GREEN data
20	G7	I	GREEN data(MSB)
21	B0	I	Blue data(LSB)
22	B1	I	Blue data
23	B2	I	Blue data
24	B3	I	Blue data
25	B4	I	Blue data
26	B5	I	Blue data
27	B6	I	Blue data
28	B7	I	Blue data(MSB)
29	GND	I	Ground
30	DCLK	I	Dot Clock
31	DSIP	I	Display On/Off (Note1)

HANTRONIX, INC.  
10080 BUBB RD.  
CUPERTINO, CA 95014

Q.A.:  
Z.W.

REV.:  
1.0

HDA500V

SHEET 6 OF 22

DATE:  
5/19/10

Pin No.	Symbol	I/O	Description
32	HSYNC	I	Horizontal synchronous signal
33	VSYNC	I	Vertical synchronous signal
34	DE	I	Input data enable control
35	NC	I	No Connect
36	GND	I	Ground
37	NC	I	No Connect
38	NC	I	No Connect
39	NC	I	No Connect
40	NC	I	No Connect

Note1: Usually pull high. High: Display On / Low: Display Off

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.:	REV.:	HDA500V	SHEET 7 OF 22
	Z.W.	1.0		DATE: 5/19/10

## Color Data Input Assignment

The brightness of each primary color (red, green and blue) is based on the 8 bit gray scale data input for the color. The higher the binary input, the brighter the color. The table provides the assignment of color versus data input.

Color		Data Signal																							
		Red								Green								Blue							
		D07	D06	D05	D04	D03	D02	D01	D00	D17	D16	D15	D14	D13	D12	D11	D10	D27	D26	D25	D24	D23	D22	D21	D20
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of RED	Red(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(253)	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Red(255)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Gray Scale Of Green	Green(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(253)	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	Green(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	
Gray Scale Of Blue	Blue(0) / Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(253)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1
	Blue(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0
Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	

## Interface Timing Input Signal Characteristics

- sync mode

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
CLK frequency	$F_{CPH}$	29.93	33.26	36.59	MHz
CLK period	$T_{CPH}$	27.32	30.06	33.41	ns
CLK pulse duty	$T_{CWH}$	40	50	60	%
HS period	$T_H$	950	1056	1600	$T_{CPH}$
HS pulse width	$T_{WH}$	1	128	$T_{HS} - 2$	$T_{CPH}$
HS-first horizontal data time	$T_{HS}$	STHD[7:0]+88 <sup>(1)</sup>			$T_{CPH}$
HS Active Time	$T_{HA}$	-	800	-	$T_{CPH}$
VS period	$T_V$	490	525	625	$T_H$
VS pulse width	$T_{WV}$	1	2	$T_{VS}$	$T_H$
VS-DEN time	$T_{VS}$	STVD[6:0]+8			$T_H$
VS Active Time	$T_{VA}$	-	480	-	$T_H$

Note: (1)  $T_{HS} + T_{HA} < T_H$


- DE mode

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
CLK frequency	$F_{CPH}$	29.93	33.26	36.59	MHz
CLK period	$T_{CPH}$	-	30.06	-	ns
CLK pulse duty	$T_{CWH}$	40	50	60	%
DE period	$T_{DEH} + T_{DEL}$	1000	1056	1200	$T_{CPH}$
DE pulse width	$T_{DEH}$	-	800	-	$T_{CPH}$
DE frame blanking <sup>(2)</sup>	$T_{DEB}$	10	45	110	$T_{DEH} + T_{DEL}$
DE frame width	$T_{DE}$	-	480	-	$T_{DEH} + T_{DEL}$

Note: (2) DE frame blanking ( $T_{DEB}$ ) must be the integer of DE period ( $T_{DEH} + T_{DEL}$ ).

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
OEV pulse width	$T_{OEV}$	-	150	-	$T_{CPH}$
CKV pulse width	$T_{CKV}$	-	133	-	$T_{CPH}$
DE(internal)-STV time	$T_1$	-	4	-	$T_{CPH}$
DE(internal)-CKV time	$T_2$	-	40	-	$T_{CPH}$
DE(internal)-OEV time	$T_3$	-	23	-	$T_{CPH}$
DE(internal)-POL time	$T_4$	-	157	-	$T_{CPH}$
STV pulse width	-	-	1	-	$T_H$

**Waveform  
DEN mode**

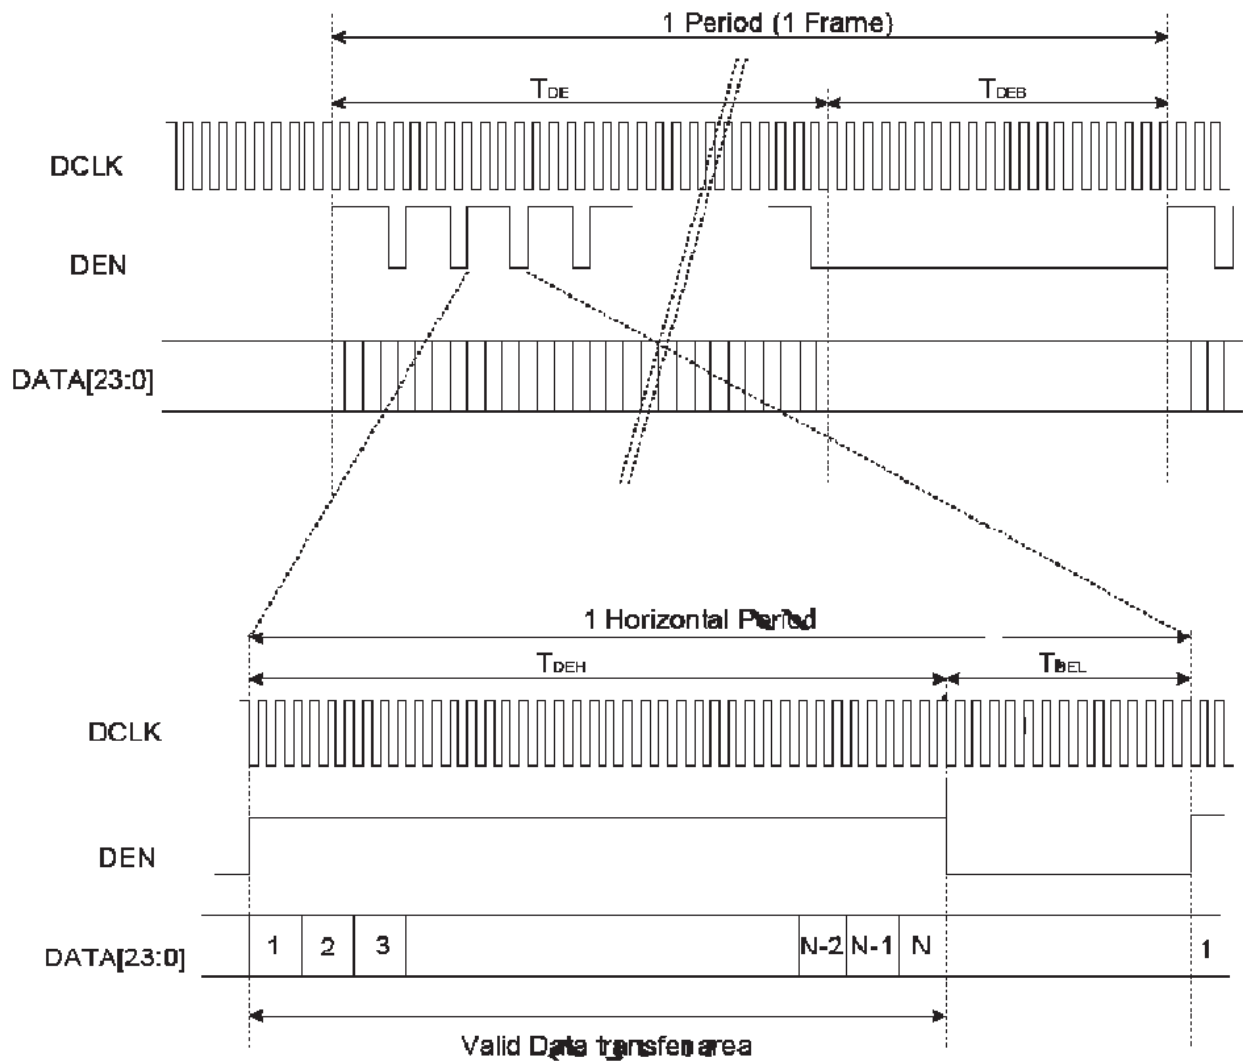



## Optical Characteristics

The optical characteristics should be measured in a dark environment ( $\leq 1$  lux) or equivalent state with the methods shown in Note (4).

Item		Symbol	Conditions	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR	$\theta_x=0^\circ, \theta_y=0^\circ$ Viewing Normal Angle	350	(400)	-	-	(2)
Response Time		$T_R$		-	15	30	ms	(3)
		$T_F$		-	35	50	ms	
Luminance(Center)		Y		270	(310)	-	cd/m <sup>2</sup>	(4)
Brightness uniformity		BUNI		75	(80)	-	%	(5)
Color Chromaticity	Red	Rx		0.590	0.640	0.690	-	(1),(4)
		Ry		0.270	0.320	0.370	-	
	Green	Gx		0.320	0.370	0.420	-	
		Gy		0.500	0.550	0.600	-	
	Blue	Bx		0.100	0.150	0.200	-	
		By	0.050	0.100	0.150	-		
	White	Wx	0.260	0.310	0.360	-		
		Wy	0.280	0.330	0.380	-		
Viewing Angle	Horizontal	$\theta_{x+}$	60	(70)	-	deg.		
		$\theta_{x-}$	60	(70)	-			
	Vertical	$\theta_{y+}$	50	(60)	-			
		$\theta_{y-}$	60	(70)	-			

HANTRONIX, INC.  
10080 BUBB RD.  
CUPERTINO, CA 95014

Q.A.:  
Z.W.


REV.:  
1.0

HDA500V

SHEET 12 OF 22

DATE:  
5/19/10


Note (1) Definition of Viewing Angle ( $\theta_x, \theta_y$ ):

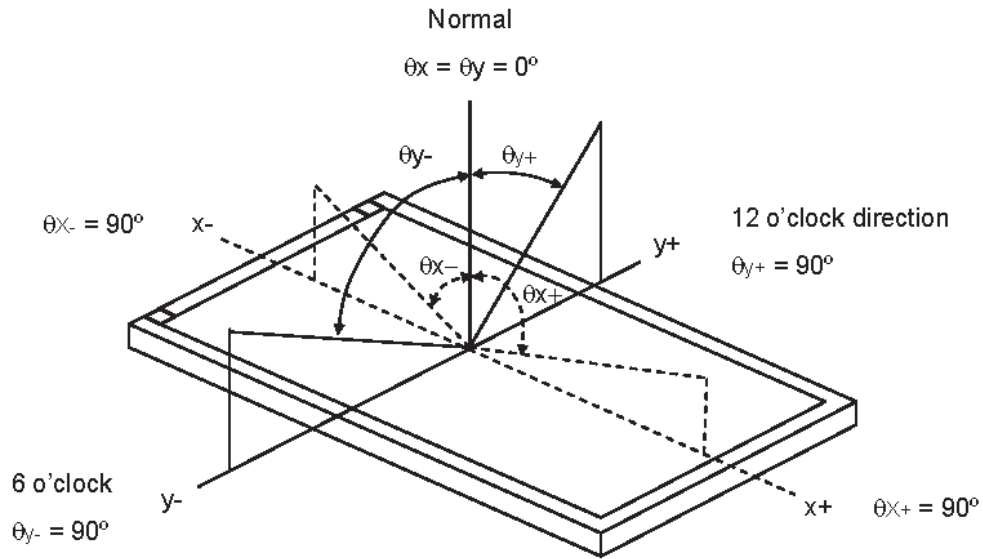

Note (2) Definition of Contrast Ratio (CR):

$$CR = \frac{\text{Luminance (brightness) all pixels "White"}}{\text{Luminance (brightness) all pixels "dark"}}$$

Note (3) Definition of Response Time ( $T_R, T_F$ ):

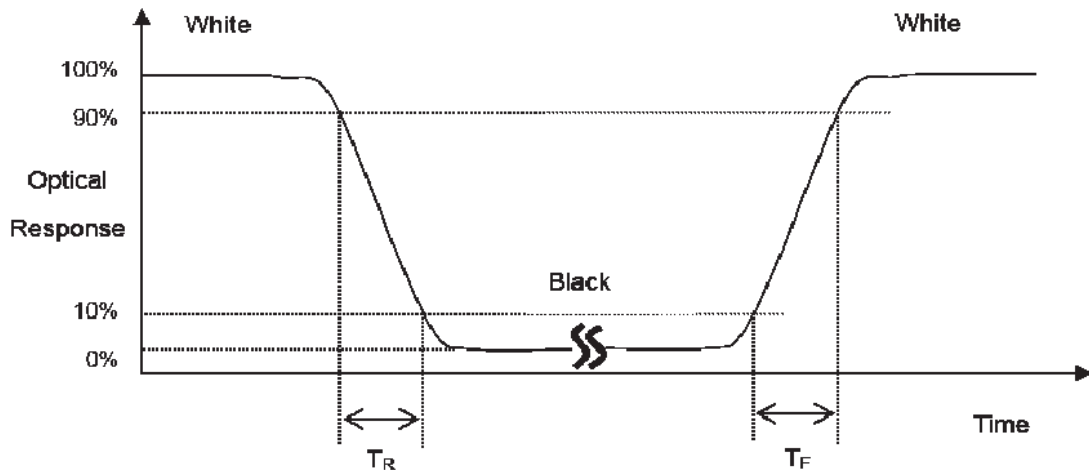

HANTRONIX, INC.  
 10080 BUBB RD.  
 CUPERTINO, CA 95014

Q.A.:  
 Z.W.

REV.:  
 1.0


HDA500V

SHEET 13 OF 22

DATE:  
 5/19/10


Note (4) Measurement Set-Up:

The LCD module should be stabilized at a given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a windless room.

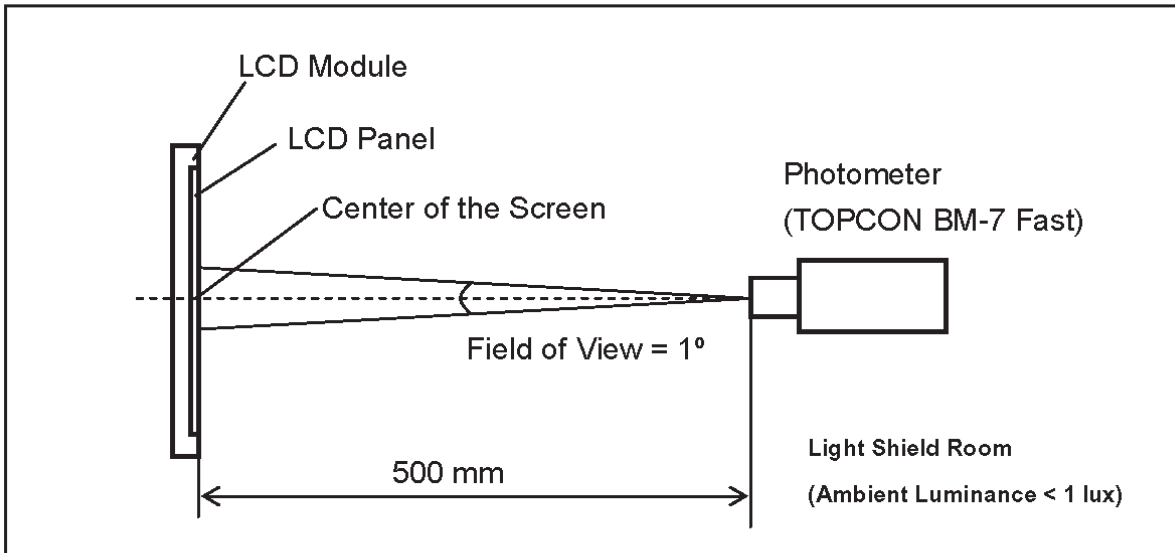

Note (5) Definition of brightness uniformity

$$\text{Brightness uniformity} = (\text{Min Luminance of 9 points}) / (\text{Max Luminance of 9 points}) \times 100\%$$

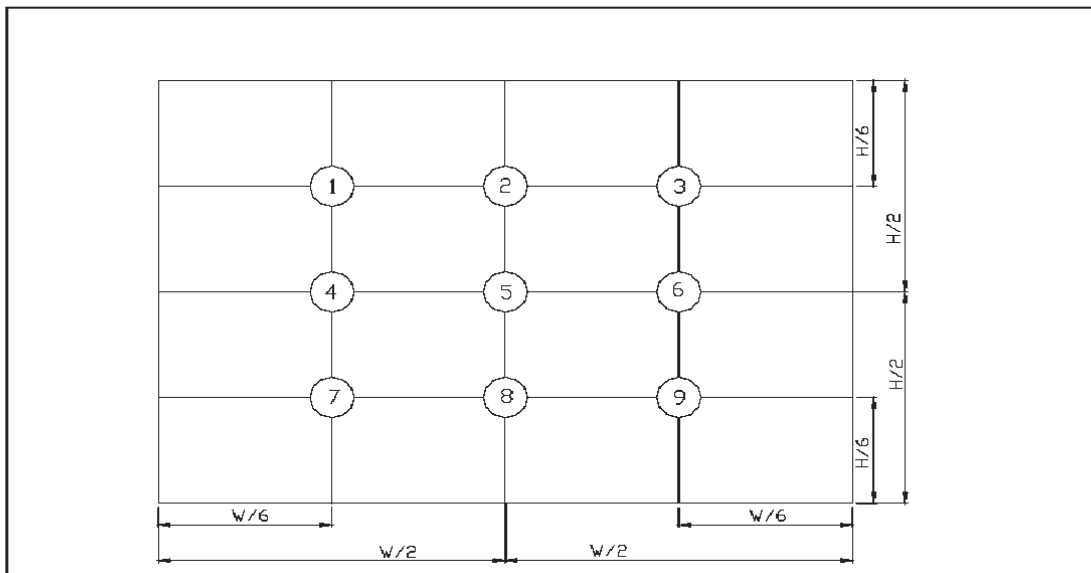

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.:	REV.:	HDA500V	SHEET 14 OF 22
	Z.W.	1.0		DATE: 5/19/10

## Reliability Test

No.	Test Items	Test Condition	Remark
1	High Temperature Storage Test	T <sub>a</sub> = 80°C 240 hours	-
2	Low Temperature Storage Test	T <sub>a</sub> = -30°C 240 hours	-
3	High Temperature Operation Test	T <sub>a</sub> = 70°C 240 hours	-
4	Low Temperature Operation Test	T <sub>a</sub> = -20°C 240 hours	-
5	High Temperature and High Humidity Operation Test	T <sub>a</sub> =60°C 90%RH 240 hours	-
6	Electro Static Discharge Test (non-operating)	-Panel Surface/Top Case : 150pF, 330Ω Air: ±15kV, Contact: ±8kV	-
7	Mechanical Shock Test (non-operating)	Half sine wave, 100G, 6ms 3 times shock of each six surfaces	-
8	Vibration Test (non-operating)	Sine wave, 10 ~ 55 ~ 10Hz, 3 axis, 2 hours/axis	-
9	Thermal Shock Test (non-operating)	-20°C(30min) ~ 70°C(30min), 100 cycles	-
10	Drop Test(with Carton)	Height: 80cm 1 corner, 3 edges, 6 surfaces	-

HANTRONIX, INC.  
10080 BUBB RD.  
CUPERTINO, CA 95014

Q.A.:  
Z.W.

REV.:  
1.0

HDA500V

SHEET 15 OF 22


DATE:  
5/19/10

## Incoming Inspection Standards

### The environmental condition of inspection

The environmental condition and visual inspection shall be conducted as below.

- (1) Ambient temperature  $25 \pm 5^\circ\text{C}$
- (2) Humidity:  $60 \pm 5\%$  RH
- (3) Viewing distance is approximately 35 ~ 40 cm
- (4) Viewing angle is normal to the LCD panel as Fig\_1 ( $10^\circ$ )
- (5) Ambient Illumination: 300 ~ 500 Lux for external appearance inspection

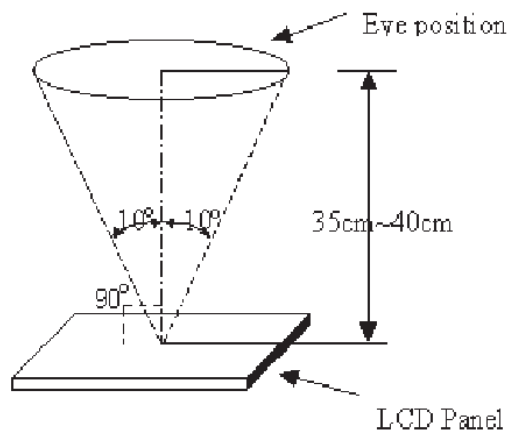

Fig\_1




### The defects classify of AQL as following:

Class of defects	AQL	Definition
Major	0.65%	It is defect that is likely to result in failure or to reduce materially the usability of the intended function.
Minor	1.5%	It is a defect that will not result in functioning problem with deviation classified.

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.:	REV.:	HDA500V	SHEET 16 OF 22
	Z.W.	1.0		DATE: 5/19/10

## Inspection Parameters

Item		Specification/Description			Note	
Display	Function	No Display			-	
		Malfunction			-	
Operating	Contrast ratio	Out of Spec			-	
	Line defect	No obvious Vertical and Horizontal line defect in bright , dark and colored.			-	
	Point Defect (red,green,blue,dark , white) Mura (50% gray)	Item	Acceptable number			Note: 1、2、5、 6、7
			A	B	Total	
		BRIGHT DOT	$N \leq 2$	$N \leq 2$	$N \leq 7$	
		DARK DOT	$N \leq 3$	$N \leq 4$		
		TOTAL DOT	$N \leq 4$	$N \leq 5$		
		TWO ADJACENT BRIGHT DOT	NOT ALLOWED			
TWO ADJACENT DARK DOT	$N \leq 1$					
THREE OR MORE ADJACENT DOT	NOT ALLOWED					
External Inspection (non-operating)	Scratch on the polarizer	L(mm)	W(mm)	Acceptable number	Note:3	
		$L \leq 2.5$	$W \leq 0.1$	4		
		$L > 2.5$	$W > 0.1$	0		
	Dent or bubble on the polarizer	Dimension(mm)	Acceptable number			Note:4
		$D \leq 0.5$	4			
		$D \leq 0.15$	Disregard			
	Foreign material on the polarizer	Dimension(mm)	Acceptable number			Note:4
		$D \leq 0.5$	4			
		$D \leq 0.15$	Disregard			

Item		Specification/Description			Note
Touch Panel	Scratch	L(mm)	W(mm)	Acceptable number	Note:3
		L ≤ 10	W < 0.05	Disregard	
			0.05 ≤ W < 0.1	N ≤ 4	
		W ≥ 0.1	0		
	Foreign Materials (Linear shape)	L ≤ 10	W < 0.05	Disregard	Note:3
			0.05 ≤ W < 0.1	N ≤ 3	
			W ≥ 0.1	0	
	Foreign Materials (Circular shape)	Dimension(mm)		Acceptable number	Note:4
		D ≤ 0.25		Disregard	
		0.25 < D ≤ 0.5		N ≤ 6	
	D > 0.5		0		
Glass chipping				$a \leq 5\text{mm}$ $b \leq 3\text{mm}$ $c \leq t$ (t : Glass think)	Note:8
				$a \leq 3\text{mm}$ $b \leq 3\text{mm}$ $c \leq t$ (t : Glass think)	Note:8
Newton-ring	(In case of doubtful situations) Observe on 60° from the product surface under a while Fluorescent lamp(3-wavelength lamp).			Average diameter ≤ 1/3 Touch Panel area Disregard.	Note:8
					

HANTRONIX, INC.  
10080 BUBB RD.  
CUPERTINO, CA 95014

Q.A.:  
Z.W.

REV.:  
1.0


HDA500V

SHEET 18 OF 22

DATE:  
5/19/10

Note1. The definition of dot defect : The dot defect was judged after repair and the size of a defective dot over 1/2 of whole dot is regarded as one defective dot.


Note2.



Note3. D : Diameter  $D=(a+b)/2$



Note4. Bright dot is defined through 6% transmission ND Filter as following.

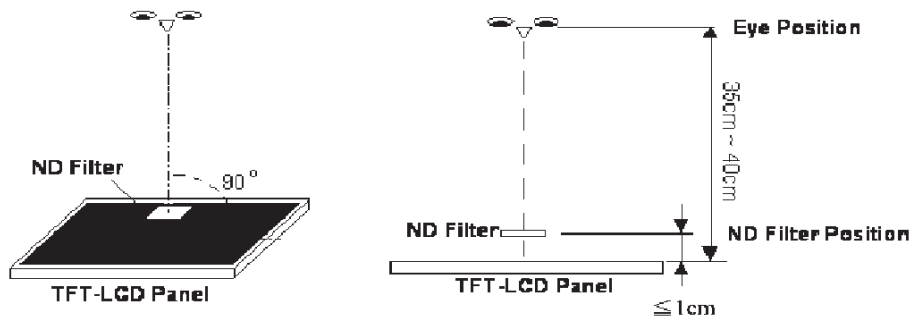


Note5. ADJACENT DOT




HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.:	REV.:	HDA500V	SHEET 19 OF 22
	Z.W.	1.0		DATE: 5/19/10

Note6.

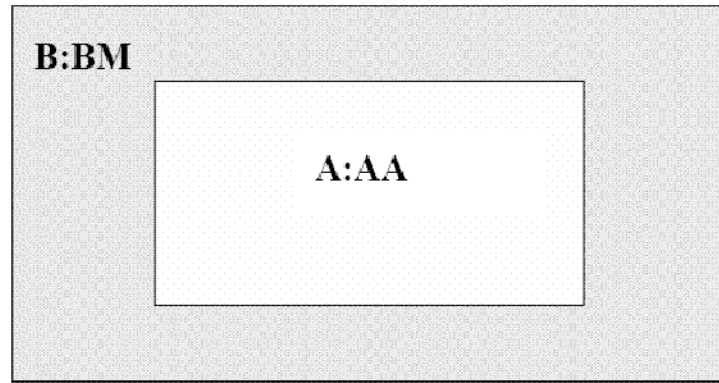

Note7.

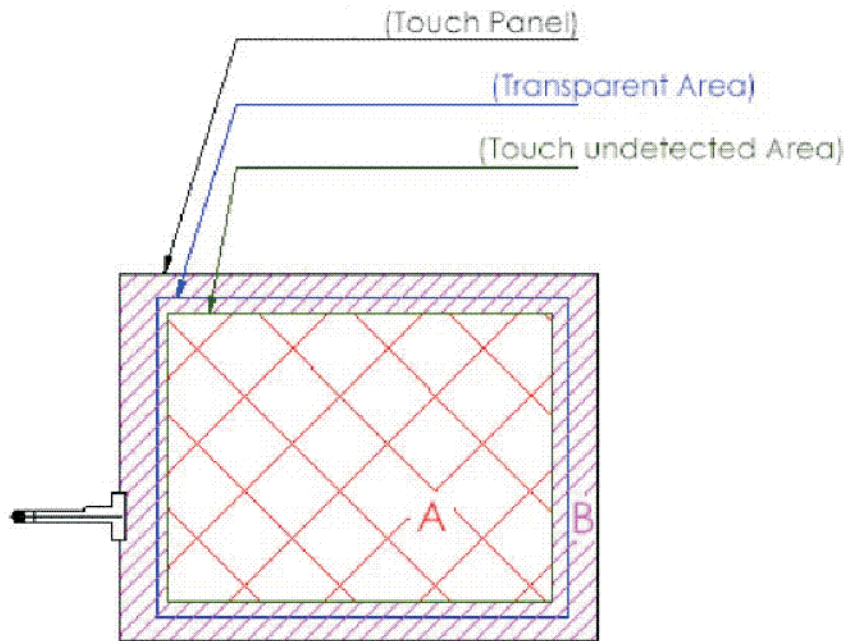


A area : Without any defect point effect on normal operation.

B area : None-specify

HANTRONIX, INC. 10080 BUBB RD. CUPERTINO, CA 95014	Q.A.:	REV.:	HDA500V	SHEET 20 OF 22
	Z.W.	1.0		DATE: 5/19/10

# Outline Drawing

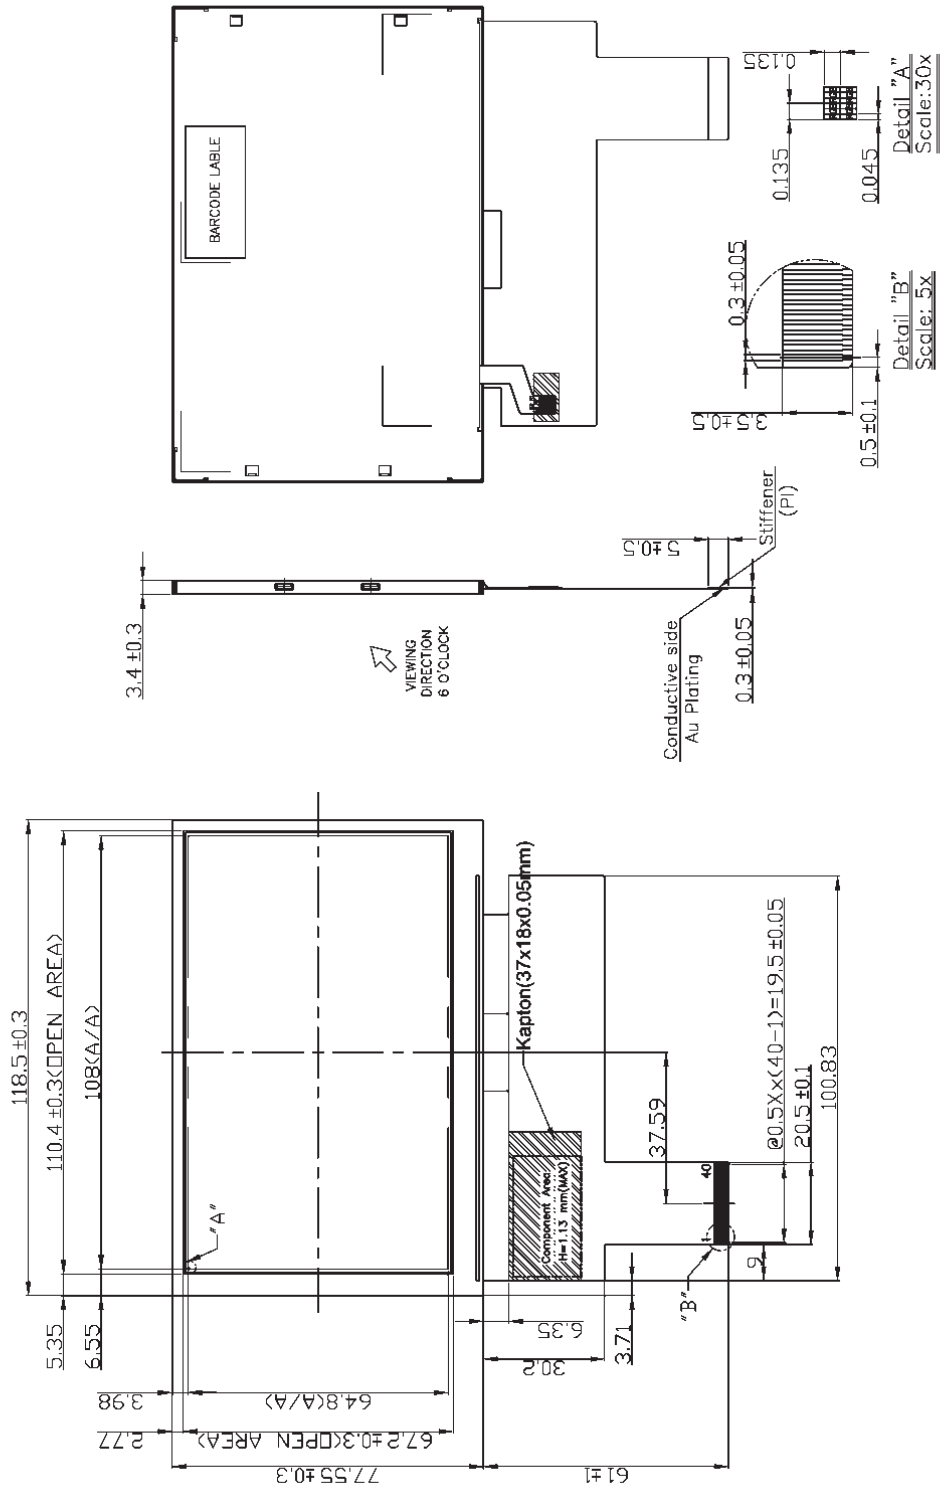

HANTRONIX, INC.  
10080 BUBB RD.  
CUPERTINO, CA 95014

Q.A.:  
Z.W.

REV:  
1.0

HDA500V

SHEET 21 OF 22  
DATE: 5/19/10

